




Speciality Magnetic Components
QUALIFIED to ISO 9001:2008

Panel Mounting Hall Effect Current Transformer Type HT300

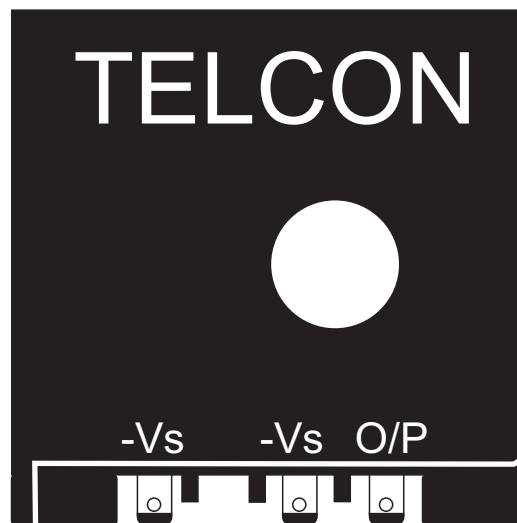

The HT300 is a closed loop Hall Effect Current Transformer suitable for measuring currents up to 300A. The product provides an output current, galvanically isolated from the primary conductor into an external load resistance.

Features

- High Accuracy
- 3 kV Proof Stress
- Fast Response
- Designed in Quality

Benefits

- Galvanic Isolation
- Ease of assembly
- High Reliability
- Non Invasive

Applications

- Variable Speed Drives
- UPS Systems
- D.C. Power Supplies
- Low Frequency Current Measurement
- Overcurrent Protection
- Robotics
- Frequency Inverters
- Power Factor Monitoring

TECHNICAL DATA

Nominal Primary Current	300A
Turns Ratio	2000:1
Nominal Power Supply	$\pm 15V \pm 5\%$
Power Supply Current	16mA per rail + output current
Minimum Load Resistance	5 Ω (0-300A)
	10 Ω (0-500A)
Operating Temperature Range	0 to +70°C
Storage Temperature Range	-25°C to +85°C

SPECIFICATION

Linearity	0.1% of nominal primary current.
Limit of Linearity	$\pm 500A$ peak value
Overall Accuracy	1% of nominal primary current
Output Zero Adjustment	$< \pm 500\mu A$ at primary current = 0A
Zero Offset/Temperature	$< 5\mu A/^{\circ}C$
Zero Offset/Supply Variation	$< 5\mu A/V$
Coil resistance	22 Ω
Bandwidth (-1dB)	dc to 100kHz
di/dt following	$> 50A/\mu s$
Delay Time	0.1 μs
dV/dt Immunity	10kV/ μs
Proof Stress Voltage	3kV a.c., rms, 50Hz for 1 minute, bore to output terminals

GENERAL DATA

Weight	110g nominal
Housing	Modified Polyphenylene Oxide
Terminations	3 off 4.8mm Euro Standard Faston Terminals
Signal Sense	Positive output obtained when current flows in direction of arrow
Conductor Temperature	The temperature of the primary conductor should not exceed 100°C
Conductor Position	Optimum dynamic performance is achieved with a single conductor filling the bore

DIMENSIONS]

